




because it works

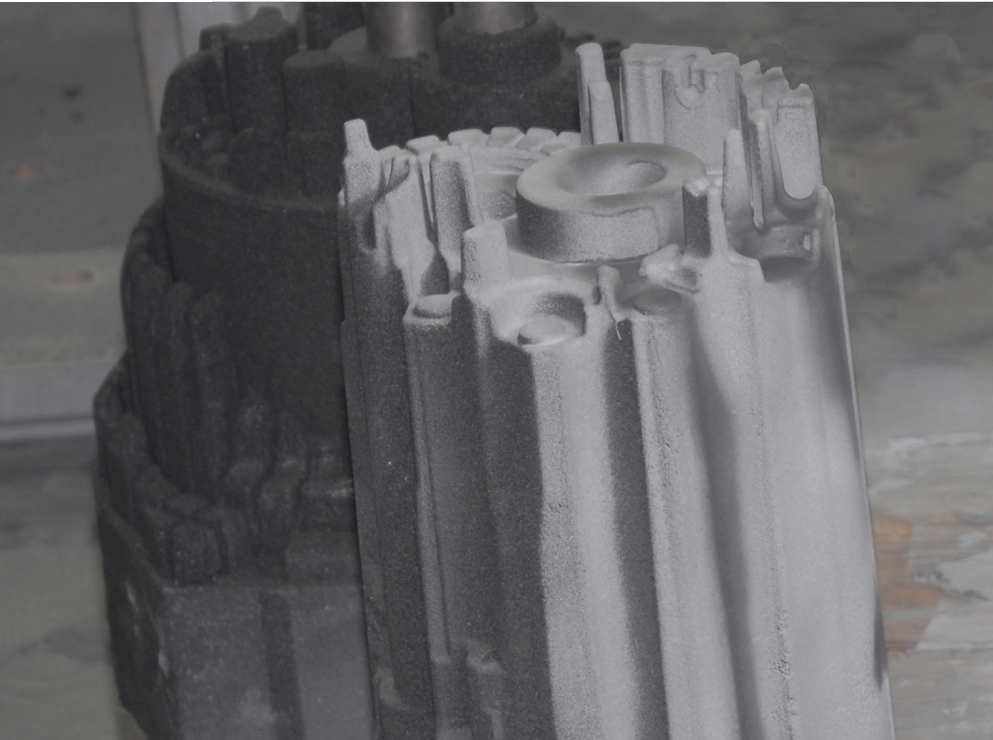

WIWA COATING UNITS FOR FOUNDRY BLACK WASH

WWW.WIWA.COM

WIWA LOW PRESSURE PUMP DA – WIWA PROFESSIONAL

Foundry washes create a sealed surface between the sand and metal necessary to allow the release of the piece from the form after casting. Black wash is applied through spraying in the fluid state using a WIWA Low Pressure Pump DA 10:1. Either Styrofoam or sand models can be coated. The coating serves to eliminate the rough finish of the form and core to produce smooth casting surfaces. Through the application of the wash using WIWA Airless technology (airless spraying), significantly less overspray is produced as compared to air-assisted systems. WIWA equipment technology for spraying black wash with various solids content.



WIWA Low Pressure Pump DA



WIWA PROFESSIONAL

TECHNICAL DATA	LOW PRESSURE PUMP DA	PROFESSIONAL 28023
Pressure Ratio	10 : 1	23 : 1
Max. Operating Pressure	80 bar	185 bar
Output per Cycle	72 ccm	153 ccm
Max. Air Inlet Pressure	8 bar	8 bar
Max. Output at Freeflow	10 l/min.	28 l/min.